

Corvette is a rolling showcase of new technology, new materials and new thinking-all part of an evolutionary process that continues year after year. Adherence to the principle of engineering excellence has been applied to all areas, from the front bumpers to the aircraft-style cockpit to the rear suspension system. It is these kinds of developmentsdetailed here-that make Corvette what it is today: one of the most renowned two-seat sports cars in the world.

For 1981, Corvette engineers trod where none have gone before by developing the world's first and only fiberglassreinforced composite automotive spring (used with automatic transmission only). It even won the Society of Plastic Engineers Grand Award. This monoleaf rear spring-at 8 lbs.-replaces a 41-lb. steel multileaf spring. And it's not just lighter. it's more efficient. It can store six times the strain-energy per unit weight than a comparable weight of spring steel. This is the lightest possible leaf spring

application to be found in any automotive suspension. And steel interleaf friction is eliminated. This fiberglass spring supports the weight of the and pivots. car that rests on the rear wheels

controlled by a system of links

Aluminum

Axle Assembly

Attention to detail for 1981

improved anti-theft alarm system with starter-interrupt feature to disable the starting circuit if forced entry is made. even if the ignition switch is bypassed. The whole system is passive-it is easily armed and disarmed automatically when you lock and unlock the doors.

Also new is an auxiliary electric fan that cuts in quietly and automatically if extra cooling is needed. This allows use of a smaller engine fan with fewer, lower-pitched blades for reduced drag and quieter operation.

Computer Command Control. It sounds high tech. and it is. It's an on-board continuously monitoring the engine under all normal

operating conditions as you wheel power transfer-unlike drive. Altitude, barometric the slippage normally found in pressure and temperature conventional automatic changes are factored in. The transmissions. whole system is even self-Look at engineering diagnostic. It pinpoints breakthroughs introduced in 1980. Corvette's front and rear bumper systems were reduced by 84 lbs. Fit and appearance

were improved, as well as

aerodynamic drag efficiency.


problems for your Chevrolet service technician. And it's even covered by the 5year 50.000-mile emissions system warranty. Ask your The front bumper consists dealer for details.

For automatic transmissions. a computer-controlled torque converter clutch in second and third gears is new. It engages at most road and load driving conditions for efficient rear

of a three-piece fiberglass supporting structure to replace the earlier steel parts. Aluminum intake manifolds eliminated another 24 lbs. And aluminum also found its place in a new rear axle assembly.

A lot has gone into Corvette The evolutionary process adds subtracts and improves. It's what makes Corvette the finely honed performance machine it is today. And it's what makes Corvette a unique experience

Bumper System

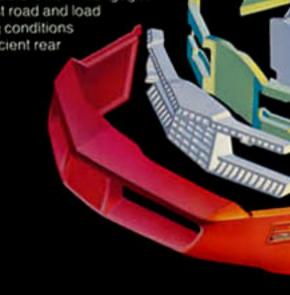

includes other engineering computer that adjusts ignition and provides suspension "We critique Corvette with developments such as timing and air fuel mixture. By compliance. Wheel position is the same engineering objectivity we'd use to evaluate a military aircraft:
What is Corvette's mission?
How well does it carry out that mission? magnesium valve rocker specific functions, it fine-tunes covers and stainless steel exhaust manifolds. And an Dave McLellan. Chief Engineer, Corvette





STANDARD EQUIPMENT

5.7 Liter (350 CID) 4-Bbl. 90° V8 engine

Black-accented magnesium rocker covers

Tubular stainless steel exhaust manifolds

Chrome-plated air cleaner cover Sealed side terminal Delco Freedom II heavy-duty battery Auxiliary electric cooling fan Computer Command Control High Energy Ignition system

Drive train

Fully synchronized 4-speed manual transmission or automatic transmission with converter clutch feature in both second and third gears Console-mounted shift lever with leather boot

Limited-slip rear axle with aluminum differential housing support

Electrical

Power windows with console-mounted controls AM/FM push-button radio with dual front speakers

and fixed mast antenna

(may be deleted for credit) Air conditioning, heater and defroster with 3-speed blower

Full instrumentation-speedometer with trip odometer 7000-RPM tachometer. voltmeter, oil pressure and water temperature gages

Quartz analog clock

Warning lights for low fuel, brakes, electric choke, seat belts and generator

Washer and dual-speed wipers with time-delay feature

Illuminated visor mirror for passenger

Courtesy and dome lights with time delay

Ashtray and cigarette lighter in center console

Dual-unit retractable headlamps with halogen inner high beams

Automatic cornering lights Dual horns

Underhood light Body exterior

Steel-reinforced fiberglass construction

Removable roof panels, with stowage bags and tie-down Tinted glass for all windows

Magic Mirror lacquer, enamel. or enamel/clear coat on all paint finishes

Dual body color sport mirrors with remote controls

Body interior

Molded shell seats with foam pads and high pivot folding backs that fold flat (passenger only)

Padded vinyl and carpeted doors with map pockets

Leather with vinyl boisters or full cloth seat trim

Molded cut-pile carpeting with carpeted floor mats Glove box lock

and light Dual padded sunshades (driver's shade extends)

Rear underfloor storage compartment with lock Interior hood release

Tilt-Telescopic steering wheel with leather-wrap rim

Center console with coin tray Carpeted luggage area with concealment shade

Day-night rearview mirror

Chassis

Power steering

Power four-wheel disc brakes with dual hydraulic circuits and brake warning light

Steel-belted radial ply blackwall tires (4)

Rally wheels with bright trim rings (4) and center caps

Lightweight bias ply fully inflated spare tire and wheel Independent front suspension

with coil springs and stabilizer bar

Independent rear suspension Fiberglass-reinforced composite single leaf spring with automatic transmission. steel multi-leaf spring with manual transmission

Integrated energy-absorbing front and rear bumpers

Side lift jack

24-gallon fuel tank with high-density polyethylene liner

Corrosion resistance

Steel-reinforced liberglass body reminder buzzer Galvanized steel body floor Hot-melt-wax frame coating

Zincroterne* coating for power steering. fuel and brake lines

SAFETY FEATURES Occupant protection

Manual lap/shoulder belts for driver (with reminder light and buzzer) and passenger

Energy-absorbing steering

Passenger guard door locks Safety door latches and stamped steel hinges

Energy-absorbing padded instrument panel with anti-reflective upper surface

Laminated windshield/ tempered side and rear glass Safety armrests

International identification symbols for controls and displays

Anti-theft

Anti-theft audio alarm system with starter interrupt feature Anti-theft ignition key

Anti-theft steering column lock

Accident avoidance

Side marker lights and reflectors

Parking lamps that Four-way hazard warning.

flasher Backup lights

Lane change feature in direction signal control Windshield defrosters. washer and dual-speed wipers


with time delay feature mirrors, convex right-hand Dual master cylinder brake

illuminate with headlamps

Vinyl-edged inside mirror Dual remote outside rearview

system with warning lights

Starter safety switch



OPTIONAL EQUIPMENT

with 8-track tape player

These ETR"

(Electronically


AM/FM stereo

feature LED

models

Tuned Receiver)

· with CB and 8-track tape player



Delco radios. Choose a Delco AM/FM stereo radio.

Or select from available Delco ETR AM/FM stereo radio models:


- BROWN BUILDING

with cassette tape player

· with CB and cassette tape player

tri-band antenna. Power antenna optional with other radios. All ETR radios include a digital clock (standard clock replaced by oil temperature gage when ETR radio is ordered).

Dual rear speakers, with extended frequency range, included with all stereo radios for dynamic sound reproduction

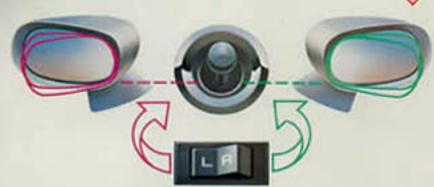

Electric twin remote control sport mirrors.

Twin sport mirrors are electrically controlled by two switches on the center console

Automatic speed control with Resume Speed feature. Designed to operate

above speeds of approximately 30 MPH (50 km/h). The speed you preset remains constant up or down hills until braking or turning the system off.



Six-way power driver's seat.

Six-way control provides good seat position for comfort, visibility and operating control access.

Electric rear window defogger. Aluminum wheels.

Removable glass roof panels with solar screening to help keep vehicle interior cooler

Goodyear white-lettered, steel-belted radial tires. P225/70R-15

P255/60R-15-Eagle GT Roof panel carrier (rear deck). Gymkhana sports suspension

includes rear stabilizer bar. higher rate rear steel springs and special tuned front and rear shock absorbers (included with trailering equipment package).

Power door lock system. Heavy-duty shock absorbers.

Trailering package includes heavy-duty radiator and Gymkhana suspension (requires automatic transmission)

2.87 ratio performance axle for automatic transmission (California only):

The GM Continuous Protection Plan

It offers service protection in addition to that provided by GM's new vehicle limited warranty Ask your dealer about it. Coverage is limited to U.S.A. and Canada for 1981 model year

A word about assembly, components and optional equipment in these Corvettes.

The Chevrolets described in this catalog are assembled at facilities of General Motors Corporation operated by the GM Assembly Division. These vehicles incorporate thousands of different components produced by various divisions of General Motors and by various suppliers to General Motors. From time to time during the manufacturing process, it may be necessary, in order to meet public demand for particular vehicles or equipment, or to meet federally mandated emissions, safety and fuel economy requirements, or for other reasons, to produce Chevrolet products with different components or differently sourced components than initially scheduled. All such components have been approved for use in Chevrolet products and will provide the quality performance associated with the Chevrolet name.

With respect to extra cost optional equipment, make certain you specify the type of equipment you desire on your vehicle when ordering it from your dealer. Some options may be unavailable when your car is built. Your dealer receives advice regarding current availability of options. You may ask the dealer for this information. GM also requests the dealer to advise you if an option you ordered is unavailable. We suggest that you verify that your car includes the optional equipment you ordered or if there are changes, that they are acceptable to you.



Specifications

CORVETTE POWER TEAMS										
Engine							Transmissions			
Standard all states	Ordering Code	Displacement '	Compression Ratio	Net Horsepower	Net Torque	4-Speed Manual	Automatic			
5.7 Liter 4-Bbl. V8(A)	L81	350 Cu. In.	8.2:1	190 @ 4200 RPM	280 LbFt. @ 1600 RPM	Standard	(B)			

(A)Produced by GM: Chevrolet Motor Division.
(B)Available in place of standard four-speed manual transmission at no extra charge.

A WORD ABOUT ENGINES	Consists are equipped with CM built engines produced by Chayrelet Mater Division
A WORD ABOUT ENGINES	Corvettes are equipped with GM-built engines produced by Chevrolet Motor Division.
	Please refer to power team information on this page, or see your dealer for details.

GENERAL		Rear-Wheel Drive; Front Engine; Corrosion-resistant, Steel-reinforced Fiberglass Body.					
TRANSMISSION	Standard Optional	4-speed Manual with 2.72 Final Drive Ratio (No Extra Charge) 3-speed Automatic with 2.87 Final Drive Ratio					
CHASSIS	Front Suspension Rear Suspension	Independent, Upper and Lower Control Arms, Coil Springs, Stabilizer Bar Independent, Transverse Leaf Spring, Lateral Struts Fiberglass-reinforced Monoleaf Rear Spring (standard with automatic transmission)					
STEERING—TYPE		Power-assisted Recirculating Ball with Tilt and Telescopic Adjustments Steering Wheel Turns, Lock to Lock 2.58 Turning Circle, Curb to Curb 40.4 Feet					
BRAKE SYSTEM		Power Four-wheel 11.75-inch Ventilated Disc Brakes with Dual Hydraulic Circuits and Warning Lights					
TIRES—TYPE		Steel-belted, Radial Ply Blackwall—Size P225/70R-15					
DIMENSIONS (Inches)		Exterior Wheelbase Length (overall) Width (overall) Height (loaded) Tread, Front/Rear	98.0 185.3 69.0 48.0 58.7/59.5	Interior Head Room Leg Room Hip Room Shoulder Room Usable Luggage	Capacity (cu. f	36.2 42.1 49.9 47.5 1.) 8.4	
APPROXIMATE CURB WTS. (lbs.)		Manual Transmission Automatic Transmission		3345 3345			
COLOR CHOICES							
Solid Exterior Red Silver Metallic		Two-Tone Exterior (Upper/Lower) (Optional at Extra Cost)		Interior Cloth Bucket Seats Leather/Vinyl Bucket Seats			
Yellow Black White Beige	Dark Blue Metallic Mahogany Metallic Claret Metallic Maroon Metallic Charcoal Metallic Dark Bronze Metallic Dark Claret Metallic	Claret Metallic/Dark Claret Metallic Silver Metallic/Dark Blue Metallic Silver Metallic/Charcoal Metallic Beige/Dark Bronze Metallic		Camel Dark Blue Silver Gray Dark Red Black Rust	Silver Gray Charcoal Dark Red Camel Dark Blue Black	Red Rust Silver	
LONG RECOMMENDED SERVICE INTERVALS*		Engine Oil Oil Filter Spark Plugs Chassis Lubrication Automatic Transmission Fluid Change 'See Owner's Manual for conditions requiring more		12 months or 7,500 miles 12 months or 7,500 miles; every 15,000 miles thereafter 30,000 miles 12 months or 7,500 miles Every 100,000 miles			



